


CLASS 125/ CLASS 250/
PN16/PN25/JIS 10K/JIS 16K

Wafer Butterfly Valves

Fig. 2302

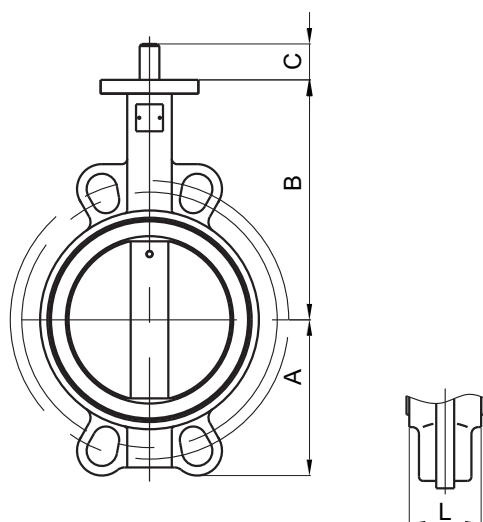

Valve Standard :

Comply with ISO 5752/BS 5155/
BS EN 593/MSS SP-67/API 609

Pressure Temperature Ratings

Working pressure	16bar/25bar
Testing Pressure	Shell:24bar/37.5bar Seal:17.6bar/27.5bar
Working Temperature	-20°C to 110°C EPDM Seat -10°C to 80°C NBR Seat
Suitable Media	Water, Oil&Gas

Material Specification

Part	Material	ASTM
Body	Cast Iron	A126 Class B
	Ductile Iron	A536 Gr. 65-45-12
Disc	Ductile Iron	A536 Gr. 65-45-12
	Bronze	B148 C95400
	Stainless Steel 304	A351 CF-8
	Stainless steel 316	A351 CF-8M
Shaft	Stainless Steel 410	A276 S 410 00
	Stainless Steel 431	A276 S 431 00
Seat Ring	EPDM / NBR	
O-Ring	EPDM / NBR	
Bushing	PTFE	
	Bronze	B62 C83600

Dimensions


DN	mm inch	40 1-1/2	50 2	65 2-1/2	80 3	100 4	125 5	150 6	200 8	250 10	300 12	350 14	400 16
A		68	80	89	95	114	127	139	175	203	242	267	316
B		110	161	175	181	200	213	226	260	292	337	368	400
C		24	30	30	30	30	30	30	34	34	34	40	52
L		33	42	45	45	51	55	55	60	67	76	76	102

DN	mm inch	450 18	500 20	550 22	600 24	650 26	700 28	750 30	800 32	900 36	1000 40	1200 48	-
A		334	370	433	468	484	530	565	602	661	724	869	-
B		422	480	533	562	540	626	660	666	722	806	938	-
C		52	64	70	70	70	95	95	95	130	130	150	-
L		114	127	151	151	172	165	167	188	203	216	276	-


CLASS 125/ CLASS 250/
PN 16/PN25/JIS 10K/JIS 16K

Wafer Butterfly Valves


Appearance

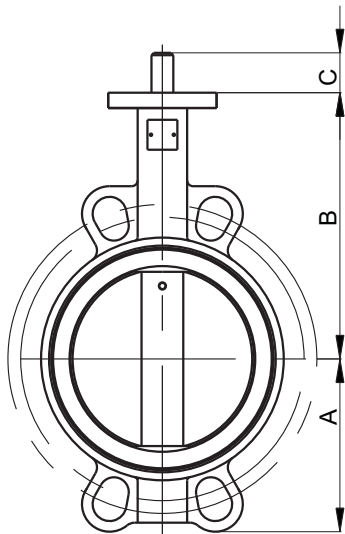

Fit DN40-DN350 Wafer Butterfly valves

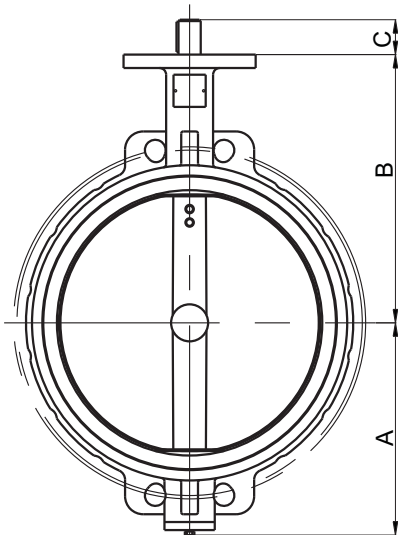

Fit DN400-DN500 Wafer Butterfly valves

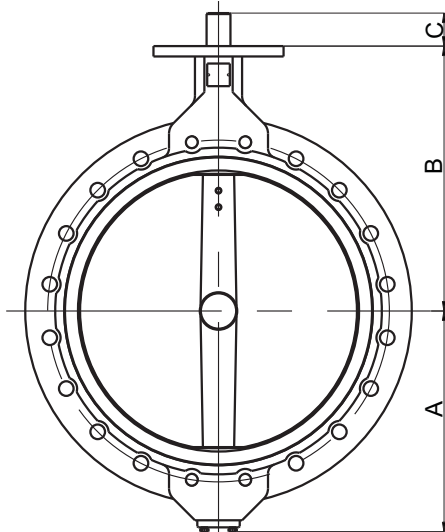

Fit DN550-DN1200 Wafer Butterfly valves